Approx. weight

Material	kg	lb
Carbon steel	60.1	133
Stainless steel 304 and 304L	60.5	133
Stainless steel 316 and 316L	61.3	135

Densities 7.85, 7.9 and 8.0 g/cm3.
Calculated from the dimensions as the standard gives them, with no allowance for tolerance.

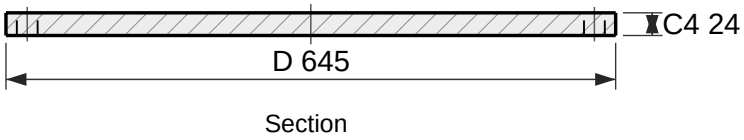

Section

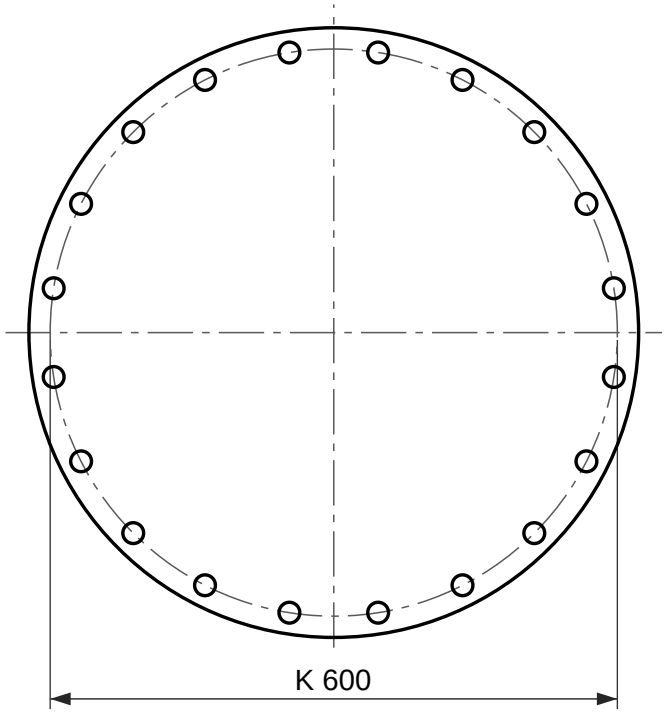

20 holes Ø22

Face view

Blind flange, EN 1092-1 type 05, PN 6

DN 500, facing type A (flat face)

Designation: Flange EN 1092-1/05/A/DN 500/PN 6
Dimensions per EN 1092-1:2018, Table 11 (PN 6) and Table 8 (facing); tolerances per EN 1092-1.
Facing type A (flat face), as 5.7.2.3 gives this type unless the order says otherwise.
Reference drawing. The purchase order and EN 1092-1 govern.
Generated at rajendradatacenter.com/flanges/en-1092-1/

Dimension	mm	in
D Outside diameter	645	25.39
C4 Flange thickness	24	0.94
K Bolt circle diameter	600	23.62
L Bolt holes, 20 off	22	0.87

20 bolts M20; holes 22 mm (0.87 in)

RAJENDRA INDUSTRIAL CORPORATION
rajendradatacenter.com
Drawing RIC-EN1092-05-PN6-DN500-A
Scale 1:8 on A4
Units: mm (inches)
Date 2026-11-22
Quote: rajendradatacenter.com/rfq/
sales@rajendradatacenter.com
+91 74338 71355