Approx. weight

Material	kg	lb
Carbon steel	39.2	86.4
Stainless steel 304 and 304L	39.4	86.9
Stainless steel 316 and 316L	39.9	88.0

Densities 7.85, 7.9 and 8.0 g/cm3.
Calculated from the dimensions as the standard gives them, with no allowance for tolerance.

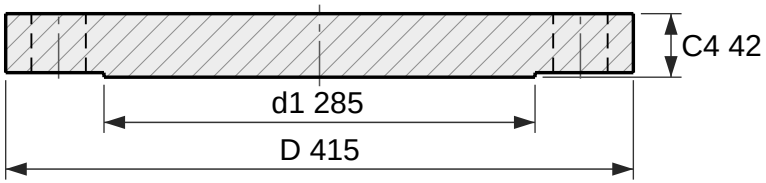

Section

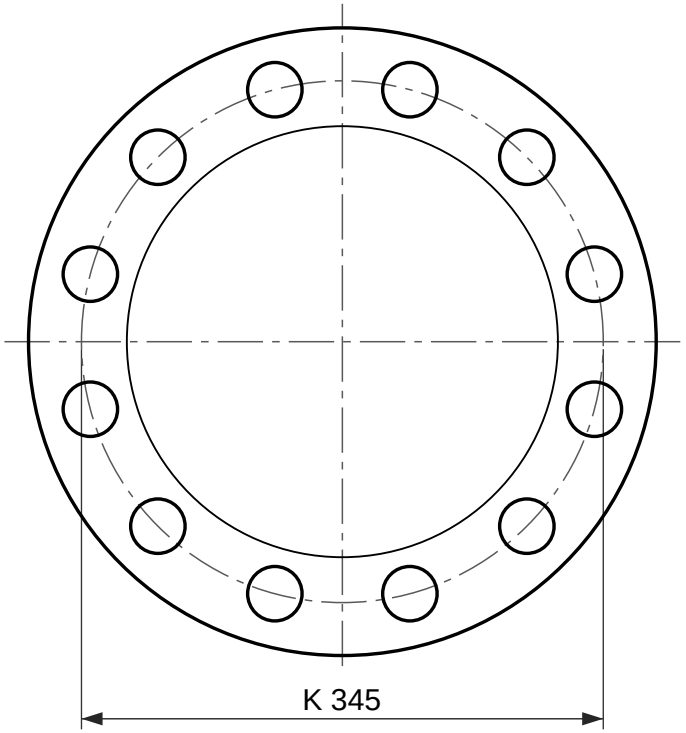

12 holes Ø36

Face view

Blind flange, EN 1092-1 type 05, PN 63

DN 200, facing type B1 (raised face)

Designation: Flange EN 1092-1/05/B1/DN 200/PN 63
Dimensions per EN 1092-1:2018, Table 16 (PN 63) and Table 8 (facing); tolerances per EN 1092-1.
C4 includes the raised face f1, as EN 1092-1 measures it.
Reference drawing. The purchase order and EN 1092-1 govern.
Generated at rajendradatacenter.com/flanges/en-1092-1/

Dimension	mm	in
D Outside diameter	415	16.34
d1 Raised face diameter	285	11.22
f1 Raised face height	3	0.12
C4 Flange thickness, raised face included	42	1.65
K Bolt circle diameter	345	13.58
L Bolt holes, 12 off	36	1.42

12 bolts M33; holes 36 mm (1.42 in)

RAJENDRA INDUSTRIAL CORPORATION

rajendradatacenter.com
Drawing RIC-EN1092-05-PN63-DN200-B1
Scale 1:5 on A4
Units: mm (inches)
Date 2026-11-22
Quote: rajendradatacenter.com/rfq/
sales@rajendradatacenter.com
+91 74338 71355