Approx. weight

Material	kg	lb
Carbon steel	129	284
Stainless steel 304 and 304L	129	285
Stainless steel 316 and 316L	131	289

Densities 7.85, 7.9 and 8.0 g/cm3.
Calculated from the dimensions as the standard gives them, with no allowance for tolerance.

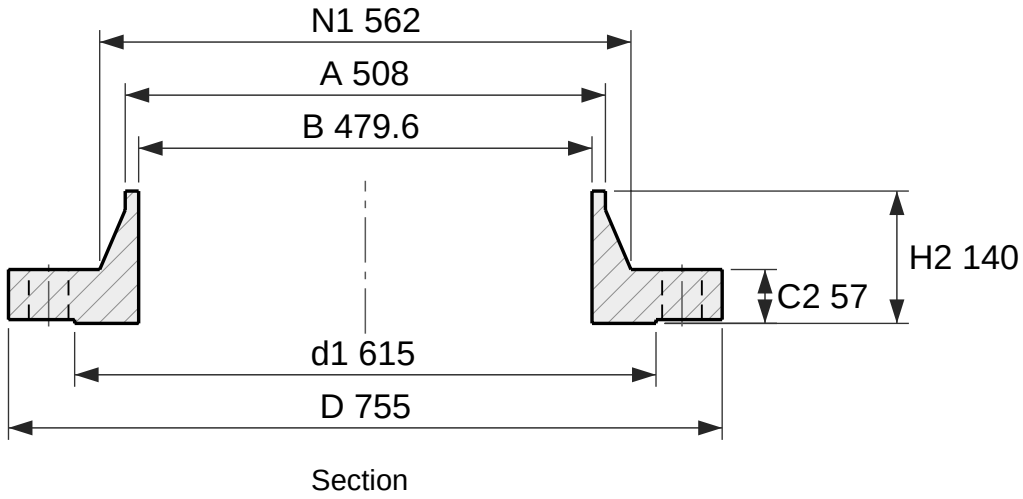

Section

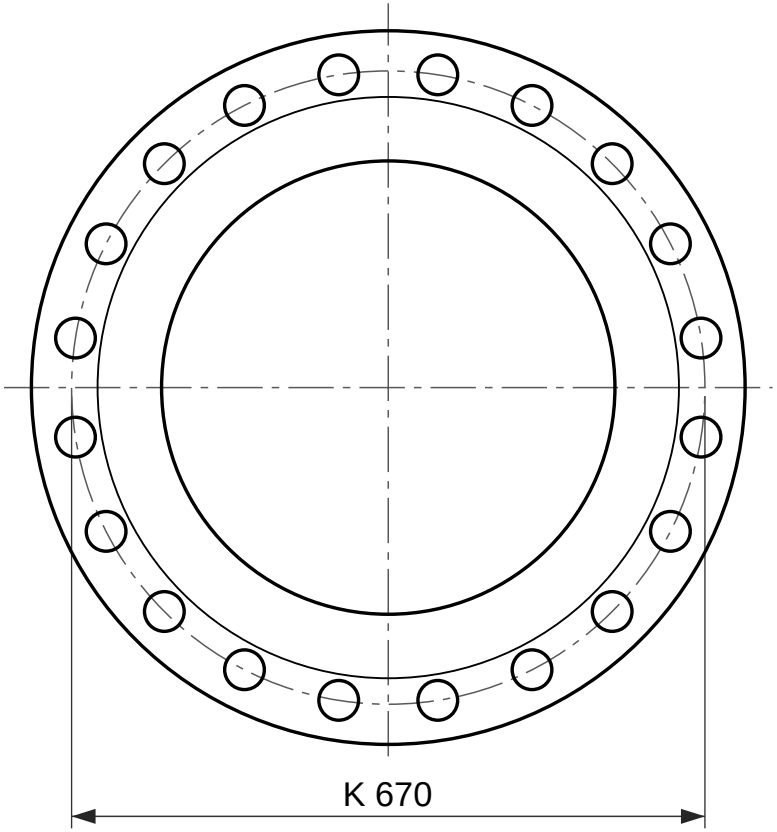

20 holes Ø42

Face view

Weld neck flange, EN 1092-1 type 11, PN 40

DN 500, facing type B1 (raised face), neck 508 × 14.2

Designation: Flange EN 1092-1/11/B1/DN 500/PN 40
Dimensions per EN 1092-1:2018, Table 15 (PN 40) and Table 8 (facing) and Annex A (wall thickness); tolerances per EN 1092-1.
C2 and H2 include the raised face f1, as EN 1092-1 measures it.
S is the minimum neck wall, from Annex A Table A.1; drawn at 14.2 mm. State the pipe wall in the order (for example DN 500 × 14.2).
Reference drawing. The purchase order and EN 1092-1 govern.
Generated at rajendradatacenter.com/flanges/en-1092-1/

Dimension	mm	in
D Outside diameter	755	29.72
d1 Raised face diameter	615	24.21
f1 Raised face height	4	0.16
C2 Flange thickness, raised face included	57	2.24
H2 Length through hub, raised face included	140	5.51
N1 Hub diameter at back face	562	22.13
A Neck outside diameter (pipe OD)	508	20.00
S Neck wall thickness (min)	14.2	0.56
B Bore, A - 2S	479.6	18.88
K Bolt circle diameter	670	26.38
L Bolt holes, 20 off	42	1.65

20 bolts M39; holes 42 mm (1.65 in)

RAJENDRA INDUSTRIAL CORPORATION

rajendradatacenter.com
Drawing RIC-EN1092-11-PN40-DN500-B1
Scale 1:8 on A4
Units: mm (inches)
Date 2026-11-22
Quote: rajendradatacenter.com/rfq/
sales@rajendradatacenter.com
+91 74338 71355