

**Approx. weight**

| Material | kg | lb |
|---|---|---|
| Carbon steel | 0.2 | 0.5 |
| Stainless steel 304 and 304L | 0.2 | 0.5 |
| Stainless steel 316 and 316L | 0.2 | 0.5 |

Densities 7.85, 7.9 and 8.0 g/cm3.
Calculated from the nominal dimensions, to the break shown: EN 1092-1 gives this type no length of its own.

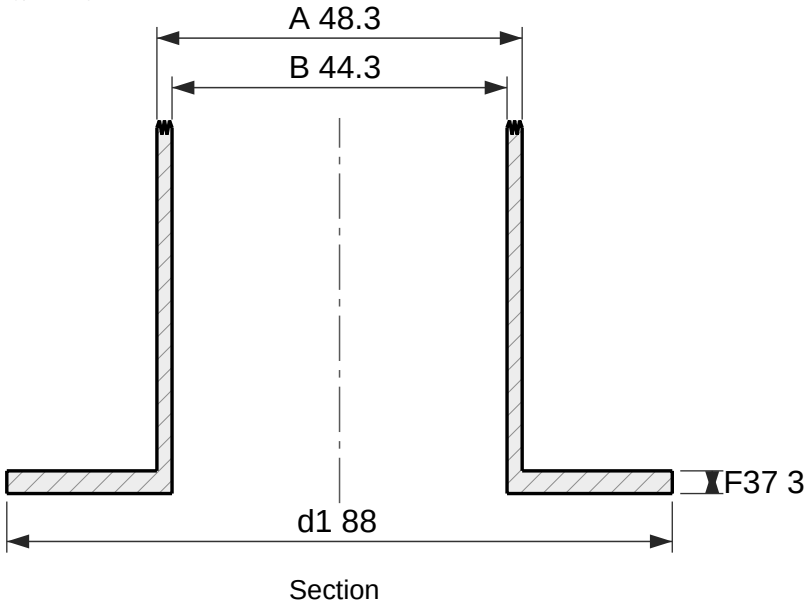


Section

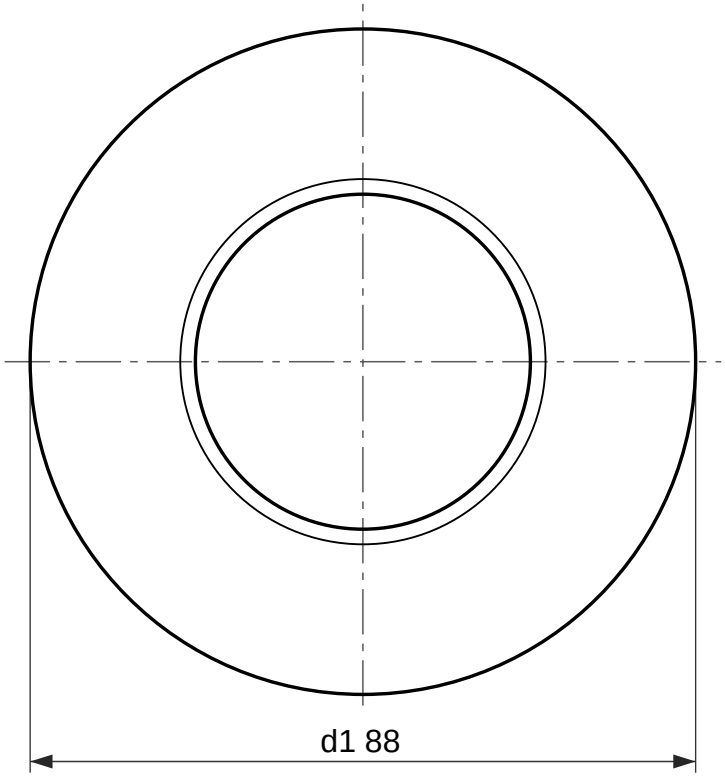


Face view

# Lapped pipe end, EN 1092-1 type 33, PN 10

DN 40, neck 48.3 × 2

Designation: Collar EN 1092-1/33/DN 40/PN 10
Dimensions per EN 1092-1:2018, Table 12 (PN 10) and Table 8 (facing) and Annex A (wall thickness); tolerances per EN 1092-1.
Collar for a type 02 loose plate flange, which bolts over it. d1 is the lap diameter and the joint face.
5.7.2.1 does not ask for a machined jointing face on this type.
A lapped pipe end is formed from the pipe itself, so the standard gives it no length and no thickness of its own beyond d1 and a thickness at least that of a type 37 collar. Drawn to a break.
EN 1092-1 gives PN 10 the same dimensions as PN 16 in DN 40; only the marking differs.
Reference drawing. The purchase order and EN 1092-1 govern.
Generated at rajendradatacenter.com/flanges/en-1092-1/

| Dimension | mm | in |
|---|---|---|
| d1 Collar outside diameter | 88 | 3.46 |
| F37 Collar thickness | 3 | 0.12 |
| A Neck outside diameter (pipe OD) | 48.3 | 1.90 |
| S Neck wall thickness (min) | 2 | 0.08 |
| B Bore, A - 2S | 44.3 | 1.74 |

RAJENDRA INDUSTRIAL CORPORATION
rajendradatacenter.com
Drawing RIC-EN1092-33-PN10-DN40
Scale 1:1 on A4
Units: mm (inches)
Date 2026-11-22
Quote: rajendradatacenter.com/rfq/
sales@rajendradatacenter.com
+91 74338 71355